



# KC HiLITES

## Daylighter® with Gravity® LED G6



Daylighter® with Gravity® LED G6 **20 Watt**

### FEATURES


- Two Models Available:
- **SAE J581/ECE R112 CERTIFIED STREET LEGAL** Daylighter® with Gravity® LED G6 Driving Beam – #652-#653: Each Light Rated at: 20-Watt; 2,300 Lumens; 1,310 LUX @ 10 Meters; 131,000 Candela
- Daylighter® with Gravity® LED G6 Spot Beam – #650-#651: Each Light Rated at: 20-Watt; 2,300 Lumens; 2,150 LUX @ 10 Meters; 215,000 Candela
- Patented Gravity® Reflective Diode (GRD™) technology yields more controlled and farther reaching light beams
- Available in both Black Powder Coated or Stainless Steel housing
- LED Color Temperature: 5,000K
- 9V to 32V
- Protected Against EMI Interference
- High Grade Aluminum housing with Hard Coated Polycarbonate Lens
- IP 68 Rated, fully self contained and sealed LED reflector housing
- Simple plug-n-play swap out conversion
- Backed by our 23-Year Warranty



### PHOTOMETRICS

Total beam distance with 0.25 Lux - 927m

#### SPOT BEAM PATTERN

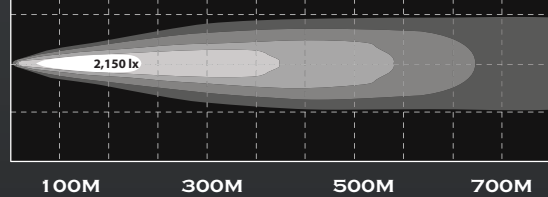


Total beam distance with 0.25 Lux - 724m

#### DRIVING BEAM PATTERN



#### SAE/ECE STREET LEGAL

### PERFORMANCE

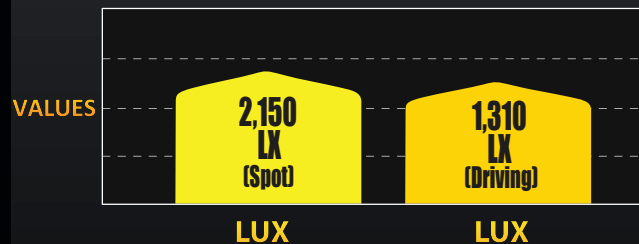

### DIMENSIONS



### KC Daylighter® with Gravity® LED G6

Pair Pack Part No.	Single Light Part No.	Model / Description	Beam Pattern	Beam Distance (m)	Watts	Volts	Lumens	Width	Height	Depth
650	1650	Daylighter® Gravity LED G6/Stainless Steel	Spot	927	20	9 - 32	2,300	6.22"	8.42"	5.38"
651	1651	Daylighter® Gravity LED G6/Blk Powder	Spot	927	20	9 - 32	2,300	6.22"	8.42"	5.38"
652	1652	Daylighter® Gravity LED G6/Stainless Steel	Driving	724	20	9 - 32	2,300	6.22"	8.42"	5.38"
653	1653	Daylighter® Gravity LED G6/Blk Powder	Driving	724	20	9 - 32	2,300	6.22"	8.42"	5.38"